


Inside View




Grounded LocatePlate

Top View

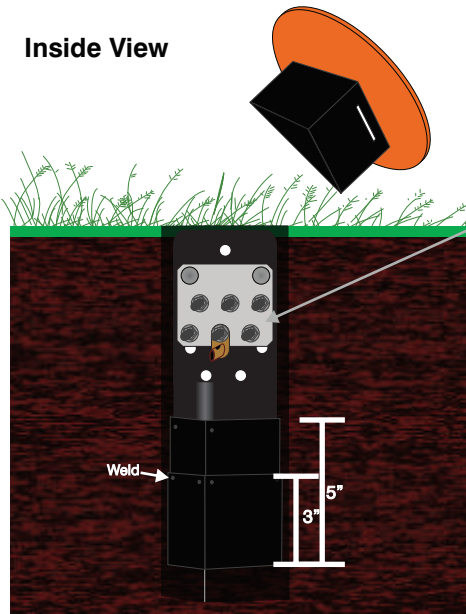


Can Wrench Locking Cap

Sliding View

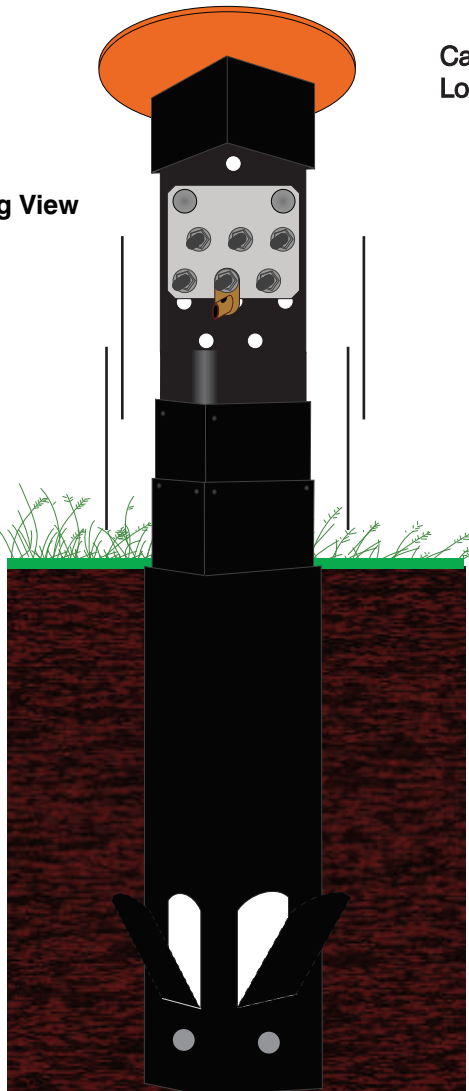

Side View

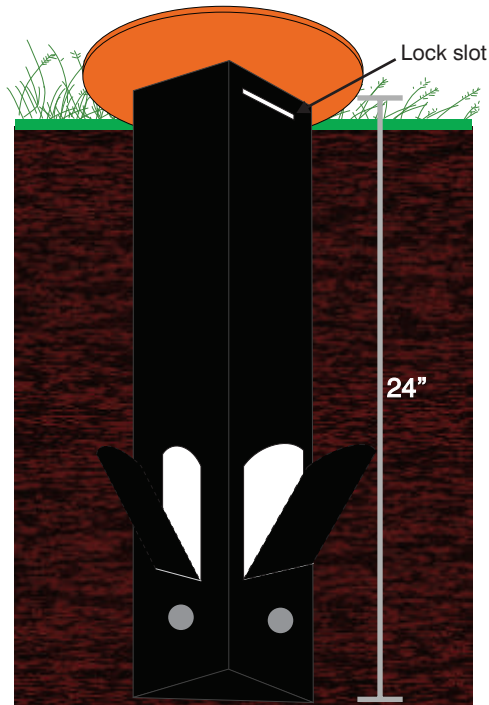

NOTES:

All materials shall be provided by Rhino Marking and Protection Systems Inc., as listed or approved equivalent by the engineer.

Material Components:

RhinoPoly™ construction, UV stable.

Installation:

HideOut™ is placed in hole using TriGrip™ Anchor System, tracer wire is run through Hideout, and hole is backfilled.

Product Features:

Material can withstand temperatures from -40° to +150° Fahrenheit. Terminal board slides for easy access. Legend is hot stamped into cover.

HideOut Size:

7" diameter cover with 24" below ground test station.

Part# RHTB-FIBER-EMC

RHINO HIDEOUT
FLUSH MOUNT TEST STATION