



**Inside View**

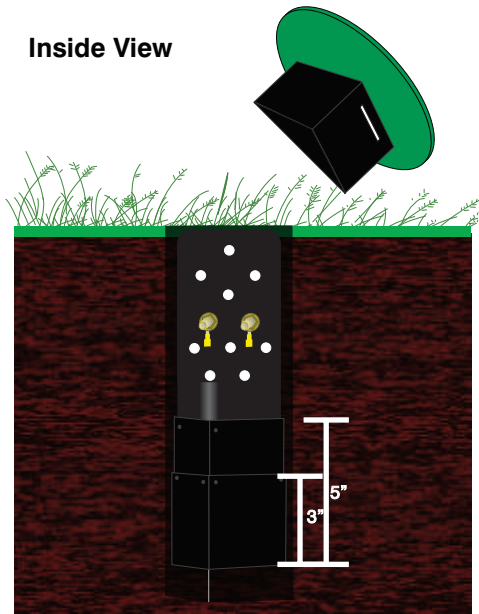

**Top View**

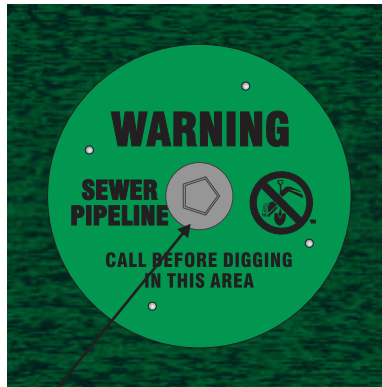

**Locking Cap**

**NOTES:**

All materials shall be provided by Rhino Marking and Protection Systems Inc., as listed or approved equivalent by the engineer.

**Material Components:**

RhinoPoly™ construction, UV stable.

**Installation:**

HideOut™ is placed in hole using TriGrip™ Anchor System, tracer wire is run through Hideout, and hole is backfilled.


**Product Features:**

Material can withstand temperatures from -40° to +150° Fahrenheit. Terminal board slides for easy access. Legend is hot stamped into cover.

**HideOut Size:**


7" diameter cover with 24" below ground test station.

**Sliding View**

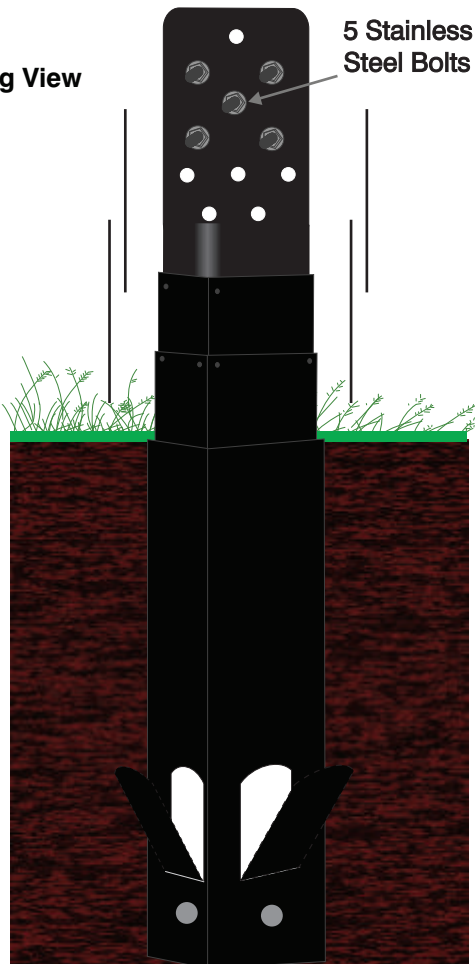

**5 Stainless Steel Bolts**

**Side View**

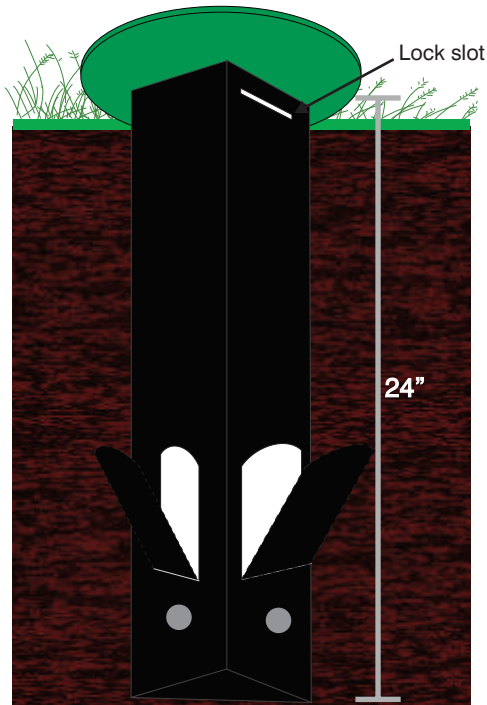

**24"**

**Part# RHTB-SEWER**

**RHINO HIDEOUT  
FLUSH MOUNT TEST STATION**