



Locking Cap

NOTES:

All materials shall be provided by Rhino Marking and Protection Systems Inc., as listed or approved equivalent by the engineer.

Material Components:

RhinoPoly[™] construction, UV stable.

Installation:


HideOut[™] is placed in hole using TriGrip[™] Anchor System, tracer wire is run through Hideout, and hole is backfilled.

Product Features:


Material can withstand temperatures from -40° to +150° Fahrenheit. Terminal board slides for easy access. Legend is hot stamped into cover.

HideOut Size:

7" diameter cover with 24" below ground test station.

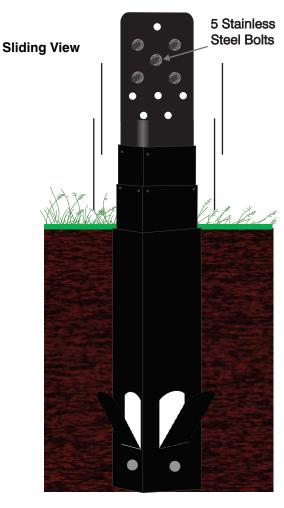

Side View

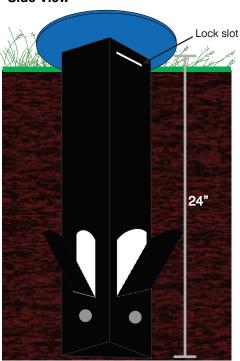

Part# RHTB-WATER

RHINO HIDEOUT FLUSH MOUNT TEST STATION